
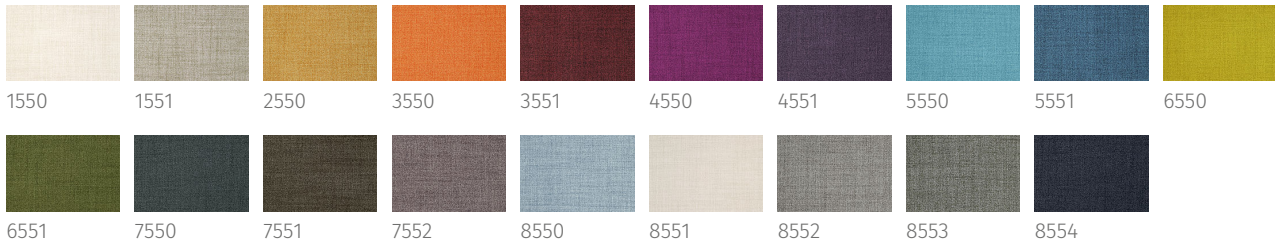


Elvin DELIGARD

Article Number 36176

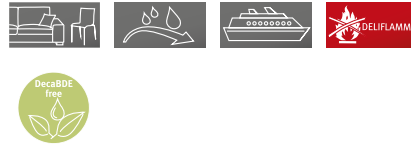

Width	140 cm
Weight	500 g/m ²
Repeat	no repeat
Composition	Effective coat 100% Polyester
Flame resistance	DIN EN 1021 Teil 1, DIN EN 1021 Teil 2, BS 5852 Crib 5, IMO Res. A652 (16), 1-M, , TRANSLATE EN: Schwerentflammbarkeit hängt von verwendetem Schaum ab.
Light fastness	5
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Abrasion to Martindale DIN EN ISO 12947-2 DIN EN 14465-2006	40000
Pilling DIN EN ISO 12945-2	note 5 at 2000 rubs
Spray test - resistance to surface wetting DIN EN 24920	note: 3
Hydrostatic pressure test DIN EN 20811	40 mbar
Care	see cleaning instructions for DELIGARD qualities

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.